


Diplexer – Double Unit

790 - 862 / 880 - 960 MHz

- ◇ 800 – 900 Bands
- ◇ Low PIM values
- ◇ High reliability
- ◇ Suitable for indoor or outdoor applications
- ◇ Simple installation
- ◇ No DC/AISG by pass

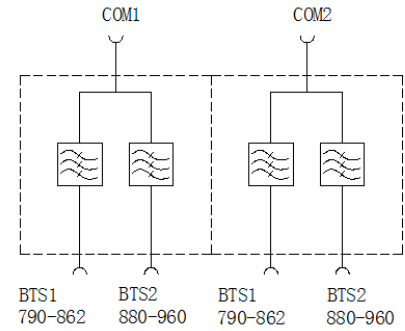

Technical Data

PRODUCT CODE	J.DPLX.MDF.DUL
Frequency	Low Band: 790 - 862 Mhz High Band : 880 - 960 Mhz
Insertion Loss	≤0.40 dB typical
VSWR/Return Loss	≤ 1.30 / ≥18dB
Input Power (per port)	200 Watt
Connectors	6 x 4.3-10 Female
Intermodulation	≤ -155 dBc (3rd order)
Isolation	50dB minimum
Impedance	50 Ω
Temperature Range	-40°C ... +65°C
Relative Humidity	5% ... 95%
Application	Indoor or outdoor (IP66)
Mounting	Wall or Pole
Weight	6 kg
Dimensions (wxhxd)	137x134x126 mm