

Splitter 2 Way



698 - 2700 Mhz & 698 – 3800 Mhz

- ◇ Multiband frequency ranges
- ◇ High reliability
- ◇ Low PIM values
- ◇ Different connector alternatives
- ◇ Suitable for indoor or outdoor use



Technical Data


PRODUCT CODE	J.S2W.NF.S2700	J.S2W.MDF.S3800
Frequency Range	698 – 2700 Mhz	698 – 3800 Mhz
Number of Ports	1 input – 2 output ports	
Connectors	N Female	4.3-10 Female
Split Loss	3.0 dB	
Insertion Loss	≤ 0.3 dB	≤0.3dB @617-2700MHz ≤0.5dB @2700-4000MHz
VSWR	≤ 1.20 (698 - 2700 MHz) ≤ 1.30 (2700 - 3800MHz)	
Power Handling	300 Watt	300 Watt
Intermodulation	≤ -153 dBc (2 x 20 W)	≤ -155 dBc (2 x 20 W)
Impedance	50 Ω	
Temperature Range	-40°C ... +75°C	
Relative Humidity	0% ... 95%	
Application	Indoor and Outdoor (IP65)	Indoor and Outdoor (IP65)
Mounting	Horizontal or Vertical	
Weight	≤ 0.3 kg	≤ 0.5 kg
Dimensions (wxhxd)	193.4x25x25 mm	191x25x25 mm

Splitter 2 Way



698 - 2700 Mhz & 698 – 3800 Mhz

J.S2W.NF.S2700

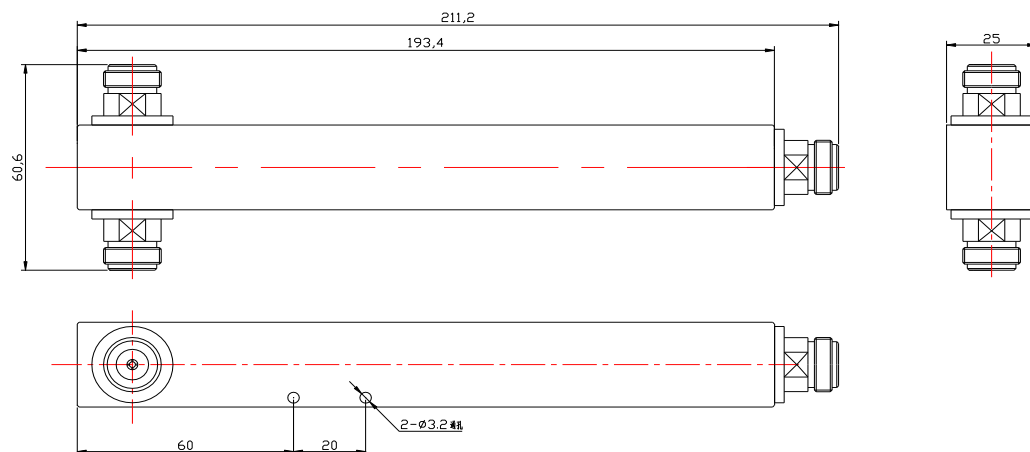

J.S2W.MDF.S3800

