

Splitter 4 Way



698 - 2700 Mhz & 698 – 3800 Mhz

- ◇ Multiband frequency ranges
- ◇ High reliability
- ◇ Low PIM values
- ◇ Different connector alternatives
- ◇ Suitable for indoor or outdoor use



Technical Data


PRODUCT CODE	J.S4W.NF.S2700	J.S4W.MDF.S3800
Frequency Range	698 – 2700 Mhz	698 – 3800 Mhz
Number of Ports	1 input – 4 output ports	
Connectors	N Female	4.3-10 Female
Split Loss	6.0 dB	
Insertion Loss	≤ 0.3 dB	≤ 1.3 @617-2700 MHz ≤ 1.3 @2700-4000MHz
VSWR	≤ 1.3	≤ 1.30
Input Power (per port)	300 Watt	300 Watt
Intermodulation	≤ -153 dBc (2 x 20 W)	≤ -155 dBc (2 x 20 W)
Impedance	50 Ω	
Temperature Range	$-40^{\circ}\text{C} \dots +75^{\circ}\text{C}$	
Relative Humidity	5% ... 95%	
Application	Indoor and Outdoor (IP65)	Indoor and Outdoor (IP65)
Mounting	Horizontal or Vertical	
Weight	≤ 0.50 kg	≤ 0.50 kg
Dimensions (wxhxd)	192x25x25 mm	228x25x25 mm

Splitter 4 Way

JMX
WIRELESS

698 - 2700 Mhz & 698 – 3800 Mhz

J.S4W.NF.S2700

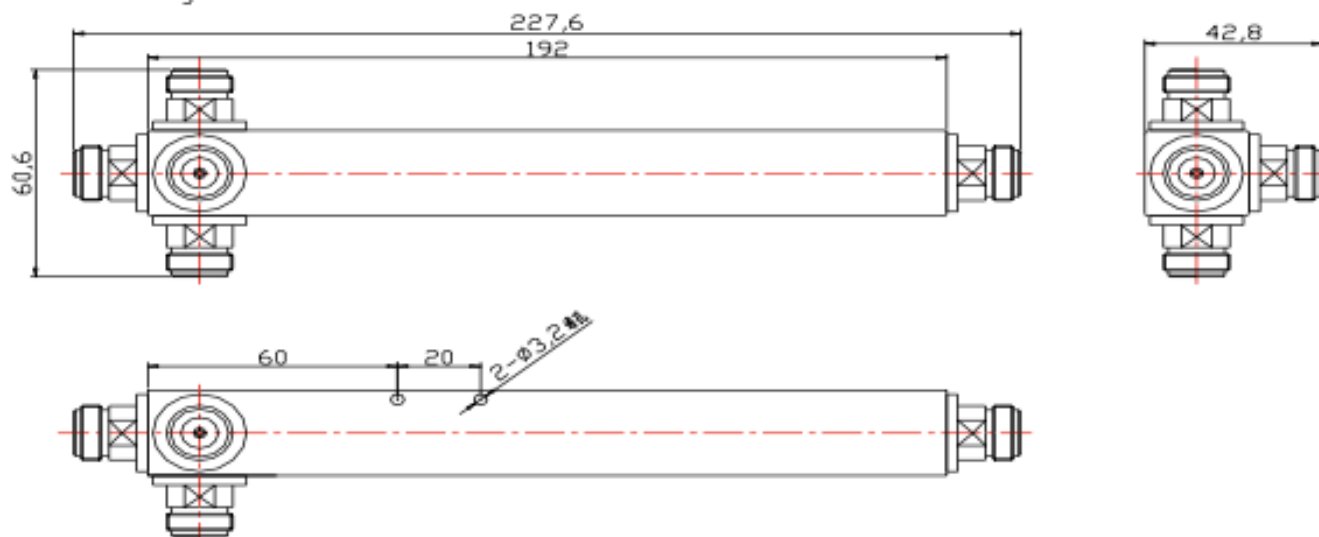

J.S4W.MDF.S3800

