


1710-1880MHz /1920-2690MHz Combiner – Double Unit



1710-1880 / 1920-2170 / 2300-2700 MHz

- ◇ DCS, UMTS, LTE band
- ◇ Low PIM values
- ◇ High reliability
- ◇ Suitable for indoor or outdoor applications
- ◇ Simple installation

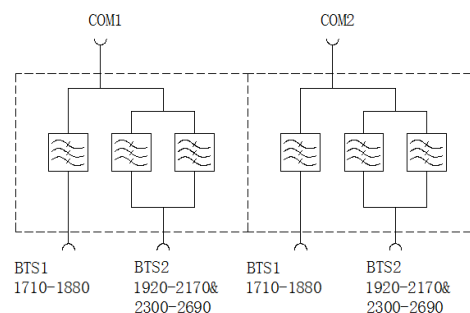

Technical Data

PRODUCT CODE	J.TRPLX.DF.DUL.1
Frequency	BTS1: 1710 - 1880 Mhz BTS2 : 1920 – 2170 Mhz to 2300 – 2700 Mhz
Insertion Loss	BTS1: ≤0.15dBtyp / 0.40max BTS2: ≤0.2dBtyp / 0.30max
VSWR	≤ 1.3
Group Delay	Low Band: 22 ns (max) Mid Band: 20 ns (max) High Band: 10 ns (max)
Input Power (per port)	300 W
Connectors	6 x 4.3-10 Female
Intermodulation	≤ -155 dBc (3rd order)
Isolation	50dB minimum
Impedance	50 Ω
DC Characteristics	No DC/AISG by pass
Temperature Range	-40°C ... +65°C
Relative Humidity	5% ... 95%
Application	Indoor or outdoor (IP66)
Mounting	Wall or Pole
Weight	4 kg
Dimensions (wxhxd)	192.5x191x115.5 mm

1710-1880MHz /1920-2690MHz Combiner – Double Unit



1710-1880 / 1920-2170 / 2300-2700 MHz

